


Automotive Fuse ---Fast-Acting Type

RoHS

ATP-Blade Terminal Fuse

Designed for the automotive industry. The ATP Blade Type Fuse doesn't only intend to protect the automotive wire and automotive apparatus but also the UPS equipment.

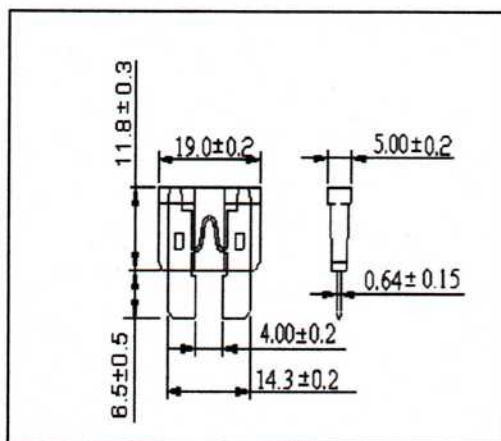

ELECTRICAL CHARACTERISTICS:

TIME CURRENT CHARACTERISTICS

% of Rating	Current Rating	Opening Time	
		Minimum	Maximum
110%	3 – 40 Amp	100 Hours	
135%	3 – 40 Amp	0.75 Sec	1800 Sec
200%	3 – 40 Amp	0.15 Sec	5 Sec
350%	3 – 40 Amp	0.08 Sec	0.5 Sec

Patented in Taiwan, Canada and U.S.A.

Agency Approvals: Listed by Underwriters Laboratories.
(3A-40A) AU2646

Design Standards : U.L. Standard for Automotive Blade
Type Fuses. SAE J1284.

Color – Coding: Blade Fuses are color-coded for
easy amperage identification.

Material: Fuse Body is made from plastic polyersulfone
Fuse Element: Tin Plated Zinc Alloy

Ordering Information:

Catalogue Number	Ampere Rating	Voltage Rating	Color Code	Nominal Resistance Cold Ohms
ATP-3	3	32	Violet	0.031
ATP-4	4	32	Pink	0.023
ATP-5	5	32	Tan	0.018
ATP-7.5	7.5	32	Brown	0.011
ATP-10	10	32	Red	0.0077
ATP-15	15	32	Blue	0.0048
ATP-20	20	32	Yellow	0.0033
ATP-25	25	32	Natural	0.0025
ATP-30	30	32	Green	0.0019
ATP-35	35	32	Rose Pink	0.0016
ATP-40	40	32	Amber	0.0014

Time-Current Characteristic Curves—Average Melt

